


Instructions for Removal of Siding

Please follow the instructions carefully:

- 1) Locate and begin at an overlap seam above the panel you wish to remove
- 2) Insert zip tool (enclosed) under the panel
- 3) Slide the zip tool along the edge with a slight downward and outward pull this will disengage the lock and expose the nail hem of the panel to be removed.
- 4) Carefully remove the nails from the sample panel and take it from the wall. At this point you may wish to place a temporary panel or covering in this area as Amcraft Building Products is not responsible for damage done to walls that are not covered when sample is removed.

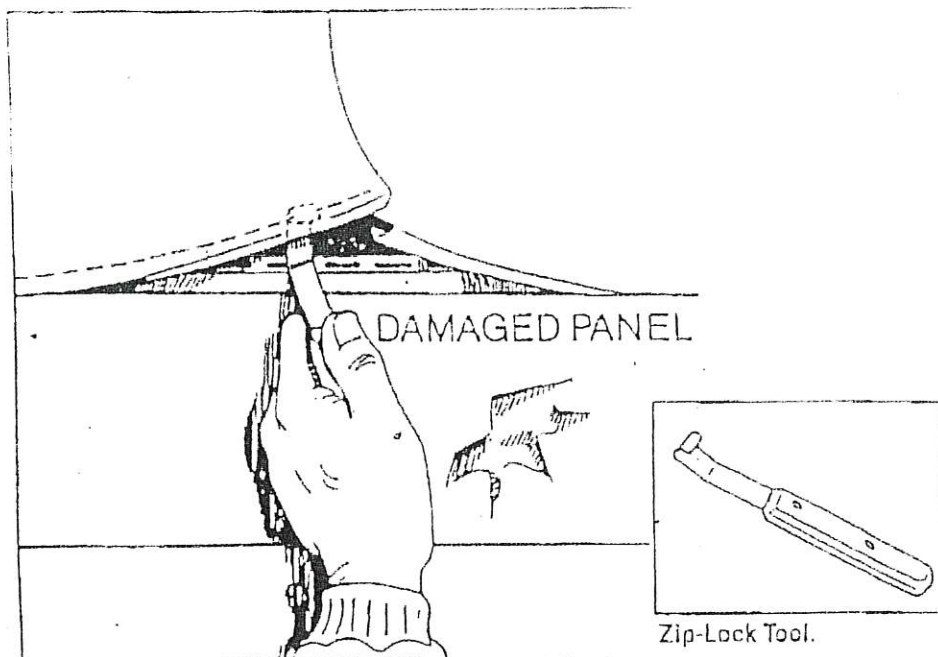

IMPORTANT

DO NOT cut the samples, they will need to be re-installed on your home if your claim is not justified. Smaller pieces can usually be found at the corners of your house. Instructions and a zip tool for removing your siding have been enclosed. Do not send a sample longer than 6 ft in length. **If your claim is denied, your samples will be returned to you.**

To install the temporary panel or to reinstall the original panel when returned to you:

- 1) Nail the panel back into place, selecting the center of the slots for your nails.
- 2) Engage the lock by gently pulling on the panel above the sample and pop the locks together.